


IBC Staging Unit

For Ignitable Liquids

Product Datasheet

SAFESPILL SYSTEMS

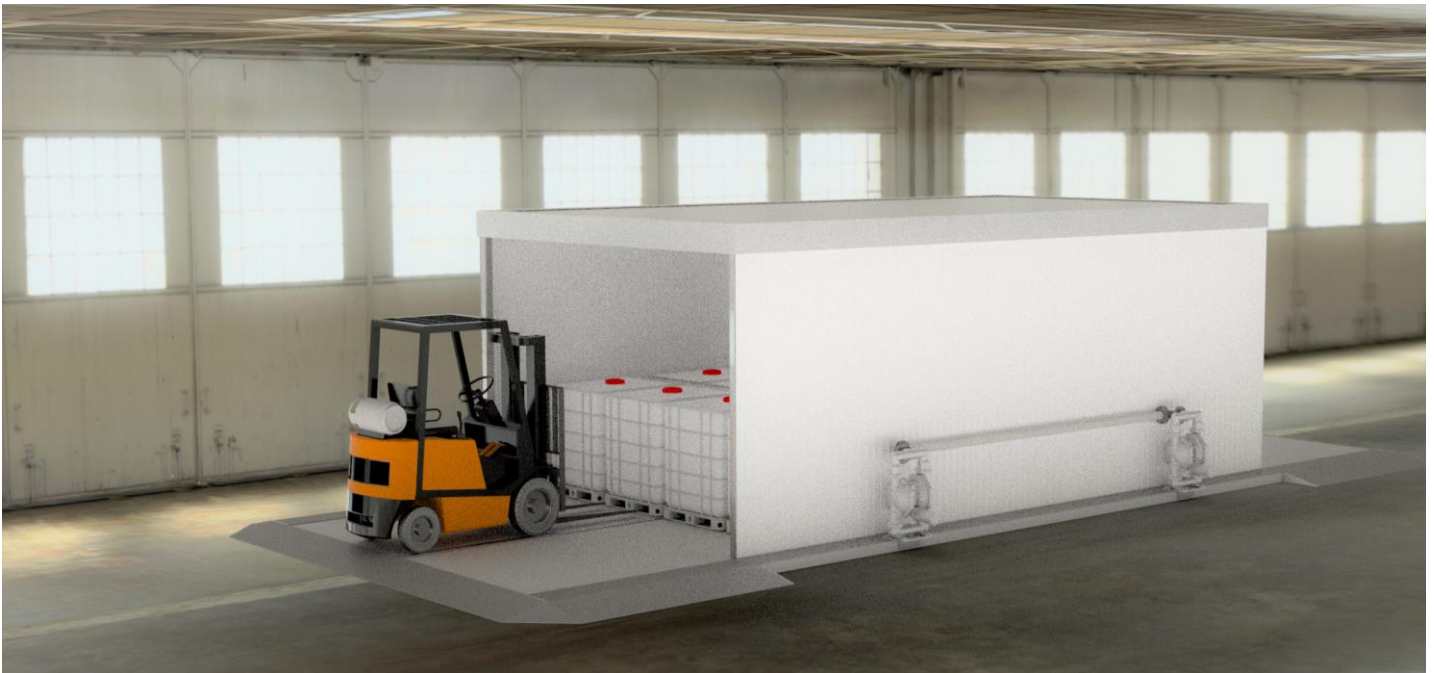

“Plug and play” protection for ignitable liquid staging

PRODUCT FEATURES

- The unit is based on Safespill’s High Flow Flooring System
- Water deluge sprinkler system, no foam
- Deluge activated by heat and flame detectors
- In case of a spill without ignition, liquid detection will activate spill removal only
- Discharge piping ties into existing containment or a dedicated above ground containment tank
- The unit is chemically compatible with all hydrocarbons, alcohols and solvents (nickel plating is offered for aggressive chemicals)

SPECIFICATIONS

Overall Dimensions (LxWxH)

2 Way Access: 940 ft² (87.3 m²) 47ft x 20ft x 10ft

1 Way Access: 740 ft² (68.7 m²) 37ft x 20 ft x 10ft

Product Staging Capacity

24 IBC’s or palletized containers

Total Water Demand

350 GPM @ 75 psi / 1,325 LPM @ 5.2 Bar

Discharge Pumps (included)

4 - 3”, air operated diaphragm or 5hp electric centrifugal pumps

Power Demand

600 CFM / 22 KW

Price

Starting at \$165,000 including suction pumps and installation



One-way access for units that need to be placed up against a wall.



Deluge sprinkler system provides overall coverage to all the IBC totes.



Top view of two-way access (discharge piping connection not shown)